

Chip Wood • Leafy Branches • Straw and even Vegetables with **ohashi** Chippers

 **Mobile
Chippers**

ES131GH

FEATURES

- * Maximum power in mobile, compact, light weight body
- * For composts, mulching, making pellets or bio-energy
- * Hydraulically powered automatic infeed rollers
- * Made in Japan - Japanese quality and reliability



Max. diameter
13
cm

Max. output
14
HP

Weight
390
kg



Only 73cm wide!



Leafy branches OK



No stress micro-computer



Able to load on a light truck or trailer

Wood Chipper ES131GH Basic performance

Max. chipping dia. 13cm

Wood



Leafy branches



ES131GH can chip wood and leafy branches of 13cm max. Leaves are also well processed. Chips can be used for composts, mulching, making pellets or bio-energy.


Two Stage Process

Chipper knife



Turn logs into chips with the powerful 2 blade rotating chipper knife.

Shredder knives



Increase chipping efficiency
※ 8 pcs / unit

Fan forced Shooter

Dispatch chips into truck or flexi bag



Fan forced shooter dispatches chips fast and directly to a truck or a flexi bag.

Dispatch above or below

Shooter



Change the dispatch angle or direction at your convenience.

Low dispatch unit



When chipping in places where a shooter may cause obstructions, like an orchard, disable the shooter and dispatch chips from below.

Easy Maintenance

Rotor cover



Knife inspection and maintenance.

Hopper



Oil inspection and engine maintenance.

Blower cover



Fan blower inspection and maintenance.

Hour meter



Equipped with hour meter.

Fuel-saving mode

Feed mode switch



Easy switch between "Normal mode" and "Branch mode". Small branches of max. dia. 5cm are chipped with "Branch mode", and more fuel saving can be achieved.

Easy to load on truck

Loading and unloading



Self-propelled crawler and compact, light weight body enable you to load onto or unload from a truck easily.

Automatic No Stress Control

Hydraulic motor



An automatic hydraulic No Stress control system, communicates with the feed roller ensuring stable and efficient feeding of materials.

Micro computer



Micro-computer between the feed roller and engine reduces engine loading stress and prevents damage.

Safety Design

Feed roller safety bar



Allow users to stop the feed roller in an emergency and if necessary without using their hands.

Brake handle



The brake handle is gripped to transport the vehicle. When released the parking brake will be activated automatically.

Advanced functions

Feed switch



It is easy to take out any clogged materials with the reverse feeding by just turning the feed switch.

Hoisting



Reinforced robust body allows for stable hoisting while attaching rope to the machine at only one place!

Recoil starter



Recoil starter cord also attached. No dead battery issues!


Wide hopper



Wide hopper for easy feeding of thick leafy branches.

Chip Applications

Bedding



Compost



Pathways



Pellets



Mulching



Heat Water



Options

Flat blade <For chipping grass and bark>



Attach flat blade to the feed roller to avoid clogging on sharp edges.

* Grass containing more water, should be discharged via the low dispatch unit because chipped grass might clog up the shooter.

Flexi bag



Easy to collect chips and eliminate mess.

Vacuum collector



Processed chips are efficiently collected and packed without raising dust.

Recommended Options

Adjust the chip size

ES131GHB - Adjust the chip size



Choose the chip size to suit your needs with ES131GHB's Flow Controller. Allows you to speed up the infeed to produce larger chips or slow down to produce very small chips for pelletizing, bio-energy and fertilizer. Use in combination with screens.

※ES131GHB is equipped with flow controller and one more screen (5mm or 8mm holed) plus standard screen (40mm holed).

Flow controller




The processing speed is adjustable by turning the flow controller. Allows you to adjust the chip size.

Screen sizes - For uniform sized chips

40mm holed screen

8mm holed screen

5mm holed screen

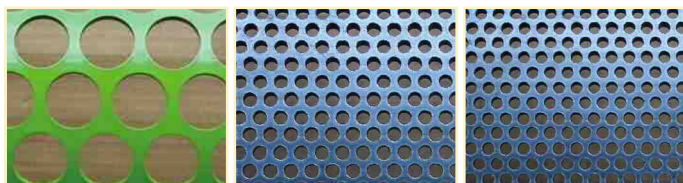

To adjust chip size and to produce uniform sized chips just change the screen.

※Different hole sized screens can be made on request.

Chip sizes

40mm holed screen

8mm holed screen

5mm holed screen



Different chip sizes suit different purposes. Choose the hole size of screen based on your needs.

ES131GH / ES131GHB Specifications

Factor		Description		Factor		Description	
Total	Product / Model name	Wood Chipper ES131GH / ES131GHB		Chipping	Feeding system	Automatic hydraulic No Stress control	
	L × W × H (mm)	In use - 2180x730x1500			Drive system	Belt clutch, V belt	
In transport - 1655x730x1610		Max.chipping dia.	130 mm				
Power	Weight	390 kg		Blade	Chipper knife 2pcs / Counter knife 1pc		
	Engine	Honda GX390			Shredder knife 8pcs		
	Max. output	14.0 HP / 10.3 kw		Infeed dimensions	200x131 mm		
	Fuel	Unleaded gasoline		Starting System	Cell / Recoil Starter		
	Fuel tank	6.8 L		Steering type	Side Cluth		
Output	Fuel consumption	2.8 L / h		Drive	Drive type	Self-propelled crawler type	
	Output type	Fan forced shooter			Speed	F1 : 1.2 km/h F2 : 2.5 km/h	
	Height of shooter	1370 mm		R : 1.4 km/h			
	Output shooter angle	Variable in 270°					

*Specifications are subject to change without notice.



ohashi inc.

401 SAKIMURA CHIYODA KANZAKI
SAGA JAPAN 842-0065
EUROPE TEL +44-20-3286-2252
JAPAN TEL +81-952-44-3135
E-MAIL global@ohashi-inc.com
WEB www.ohashi-inc.com

DISTRIBUTOR FOR UK AND IRELAND:
Brightgreen Recycling Ltd, Fleenstown, The Ward,
Co. Dublin D11 ET71, Ireland
Ph: +353 86 3881615
E: aidan@brightgreen.ie

BrightGreen Recycling Ltd.